


**DIN 933****Tornillo de cabeza hexagonal totalmente roscado**ISO 4017 EN  
24017

<b>d</b>	<b>M3</b>	<b>M4</b>	<b>M5</b>	<b>M6</b>	<b>M7</b>	<b>M8</b>	<b>M10</b>	<b>M12</b>	
P	0,5	0,7	0,8	1	1	1,25	1,5	1,75	
k	2	2,8	3,5	4	4,8	5,3	6,4	7,5	
s	5,5	7	8	10	11	13	17/16*	19/18*	
L	(4-30)	(5-70)	(6-80)	(6-80)	(7-100)	(8-120)	(8-150)	(10-150)	
<b>d</b>	<b>M14</b>	<b>M16</b>	<b>M18</b>	<b>M20</b>	<b>M22</b>	<b>M24</b>	<b>M27</b>	<b>M30</b>	
P	2	2	2,5	2,5	2,5	3	3	3,5	
k	8,8	1	11,5	12,5	14	15	17	18,7	
s	22/21*	24	27	30	32/34*	36	41	46	
L	(10-150)	(12-150)	(16-200)	(16-200)	(16-200)	(16-200)	(22-200)	(35-200)	
<b>d</b>	<b>M33</b>	<b>M36</b>	<b>M39</b>	<b>M42</b>	<b>M45</b>	<b>M48</b>	<b>M52</b>		
P	3,5	4	4	4,5	4,5	5	5		
k	21	22,5	25	26	28	30	33		
s	50	55	60	65	70	75	80		
L	(35-200)	(35-200)	(35-200)	(40-200)	(40-200)	(40-200)	(50-200)		
4.6	4.8	5.6	5.8	6.8 ●	8.8 ●	10.9 ●	12.9 ●	A2 ●	A4 ●

\* Tamaño según norma ISO.

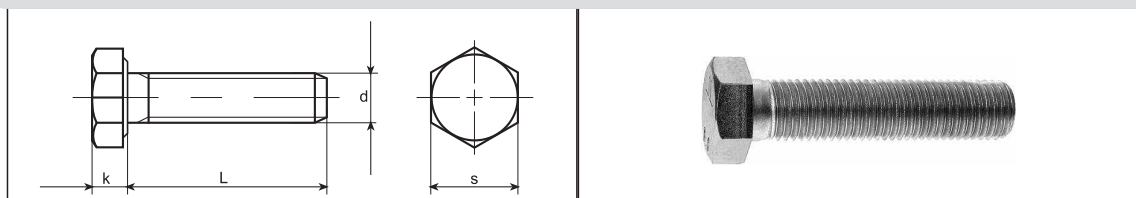